

# HydroTac-50

Tackifier/Binder for Hydro-Seeding

HYDROTAC-50

## Product Description

**HydroTac-50** is a liquid polyvinyl acetate polymer containing 50% solids. **HydroTac-50** is used as a tackifier/binder for hydraulic seeding (hydro-seeding).

**HydroTac-50** forms a colorless, transparent micro-plastic membrane to bind the seed, mulch and soil particles until germination is achieved. **HydroTac-50** is biodegradable and is non-toxic to plant and animal life.

**HydroTac-50** application should not be made during rain or periods when rain may be expected during a 24 hour period. For best curing of emulsion, application should not be made at temperatures lower than 40 degrees Fahrenheit. Treated area shall be free of water until cured. Cure time is 8 hours to 48 hours depending on weather temperatures.

## Application

**HydroTac-50** is typically diluted with water at a ratio of 20 parts water to 1 part **HydroTac-50**.

*(Example: 75 gallons HydroTac-50 : 1,500 gallons water)*


**Standard Treatment:** 55-75 gallons **HydroTac-50** per acre

**Extreme Slopes:** 100+ gallons **HydroTac-50** per acre

## Product Specifications

Color  
Form  
Weight  
Solids  
Flammability  
Flash point open cup  
Storage Life

White to off white, colorless when cured.  
Liquid  
9.2 pounds per gallon  
50%  
Non-flammable  
None  
Do not freeze. Repeated freezing and thawing will cause the product to break down.

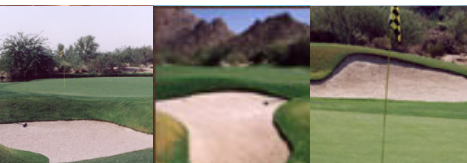

EROSION CONTROL AND STABILIZATION PRODUCTS

1-888-828-7300 • [www.soil-loc.com](http://www.soil-loc.com)

SOIL•LOC